


/U{pejtqpk/gf."Fwcn" Iki cdkv"Rqtvu

The Sonoma is a high-performance Time Server that provides a secure and reliable sp ^ | ducts. This design achieves a

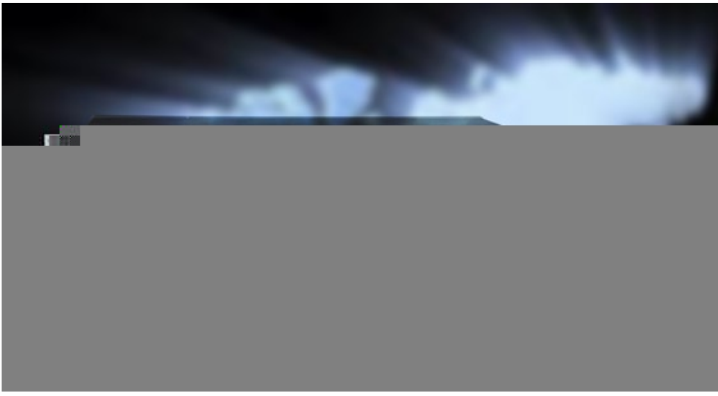

0%

%

%



Web Interface

—

Extended Stratum 1 Operation if Signal Lost

Easy Installation

%

Oscillator	Holdover Drift Rate	Holdover Period*
TCXO	10 milliseconds per first day	24 hours
Premium OCXO**	80 microseconds per first day	35 days
Rubidium	5 microseconds per first day	140 days

